


FRONT VIEW


SIDE VIEW

RECOMMENDED LUG:
INTERNATIONAL CONNECTOR
#RU-250



400 AMP

RECOMMENDED LUG:
INTERNATIONAL CONNECTOR
#RU-350




600 AMP

LUG MOUNTING

RECOMMENDED BOLT:
3/8-16 x 1" LONG

RECOMMENDED BOLT:
1/2-13 x 1-1/4" LONG

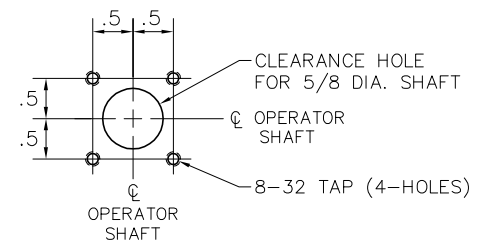

DRILLING LAYOUT

VOLTAGE (AC)	AMPS	CAT. NO. 3 POLE	CAT. NO. 2 POLE	A	B	C
240 (USE 300 V. FUSES)	400	T325-5	T225-5	13.625	.187	1.406
	600	T326-6	T226-6	13.687	.250	1.500
600 (USE 600 V. FUSES)	400	T365-5	T265-5	14.500	.187	1.406
	600	T366-6	T266-6	14.625	.250	1.500

**400 & 600 AMP SERIES T SWITCHES
WITH GENEVA DUAL OPERATOR**

SCALE: APPROVED BY: DRAWN BY JWE
DATE: 7-14-93 REVISED 1

boltswitch, inc.
CRYSTAL LAKE, ILLINOIS 60014

DRAWING NUMBER
0-1159

REV. 1 6-13-05 KJE WAS INCORRECTLY SHOWN WITH SINGLE CROSSBAR; 13.625 WAS 13.687; 13.687 WAS 13.750; 14.500 WAS 14.562