


800 A. TERMINAL

RECOMMENDED TERMINAL LUGS: RA600
WIRE RANGE: 600MCM - 4, CU9AL
MAXIMUM LUGS PER TERMINAL: 4

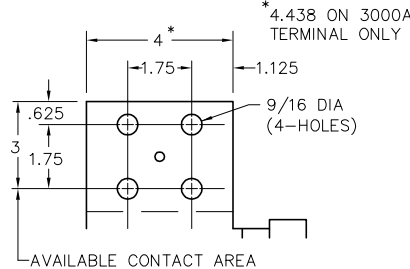

1200-3000 A. TERMINAL

RECOMMENDED TERMINAL LUGS: RA600 & RA600SW
WIRE RANGE: 600MCM - 4, CU9AL
MAXIMUM LUGS PER TERMINAL: 8

AMP	CATALOG NUMBER	NET WEIGHT	A	B	C	D	E	F
800	M800	70	16	2	2	.375	1.75	40
1200	M1200	75	18.5	3.25	3.25	.375	1.75	44
1600	M1600	80	18.5	3.25	3.25	.375	1.75	44
2000	M2000	100	18.5	3.25	3.25	.5	1.875	44
2500	M2500	120	18.5	3.25	3.25	.625	1.875	44
3000	M3000	125	18.5	3.25	3.25	.75	1.875	44

800-3000 AMP 2-POLE 250VDC
NO-FUSE MILL SWITCH

SCALE: APPROVED BY: DRAWN BY JAE
DATE: 8-17-76 REVISED 7/

boltswitch, inc.
CRYSTAL LAKE, ILLINOIS 60014

DRAWING NUMBER
O-1145

REV 7 8-27-10 OPERATOR & HANDLE REVISED JAE
REV 6 5-8-08 4000 AMP REMOVED FOR MARKETING REASONS ETM
REV 5 11-13-02 DIM ADDED FOR PANEL WIDTH JAE
REV 4 8-6-96 DWG REDWN; RECOMMENDED LUGS ADDED JAE